


Rondelle ressort

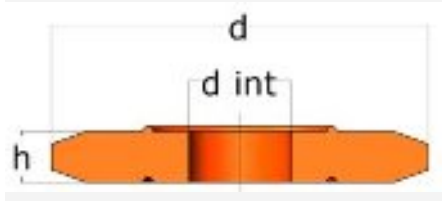

Tolleranze
d, d int., h : JS15

Materiale	Durezza
U80	80 ShA
U90	90 ShA
U95	95 ShA

★ *Quantità minima*

Ref.	d	d int.	h		★
206	20	9	6		50
256	25	9	6		40
286	28	13,5	6		40
306	30	13,5	6		40
328	32	13,5	8		40
358	35	14	8		40
408	40	14	8		40
458	45	17,5	8		32
5010	50	17,5	10		32
5510	55	17,5	10		32
6310	63	17,5	10		32
7012	70	21,5	12		20
8012	80	21,5	12		20
10012	100	21,5	12		20
12514	125	27	14		20